


### Features:

- 21.5" TFT LED LCD screen
- Integrated capacitive touchscreen
- Rugged all-aluminum construction for a wide range of applications
- Long life and high reliability
- Fast response time, no smear, no jitter
- Ultra-wide viewing angle for clear picture quality at large angles

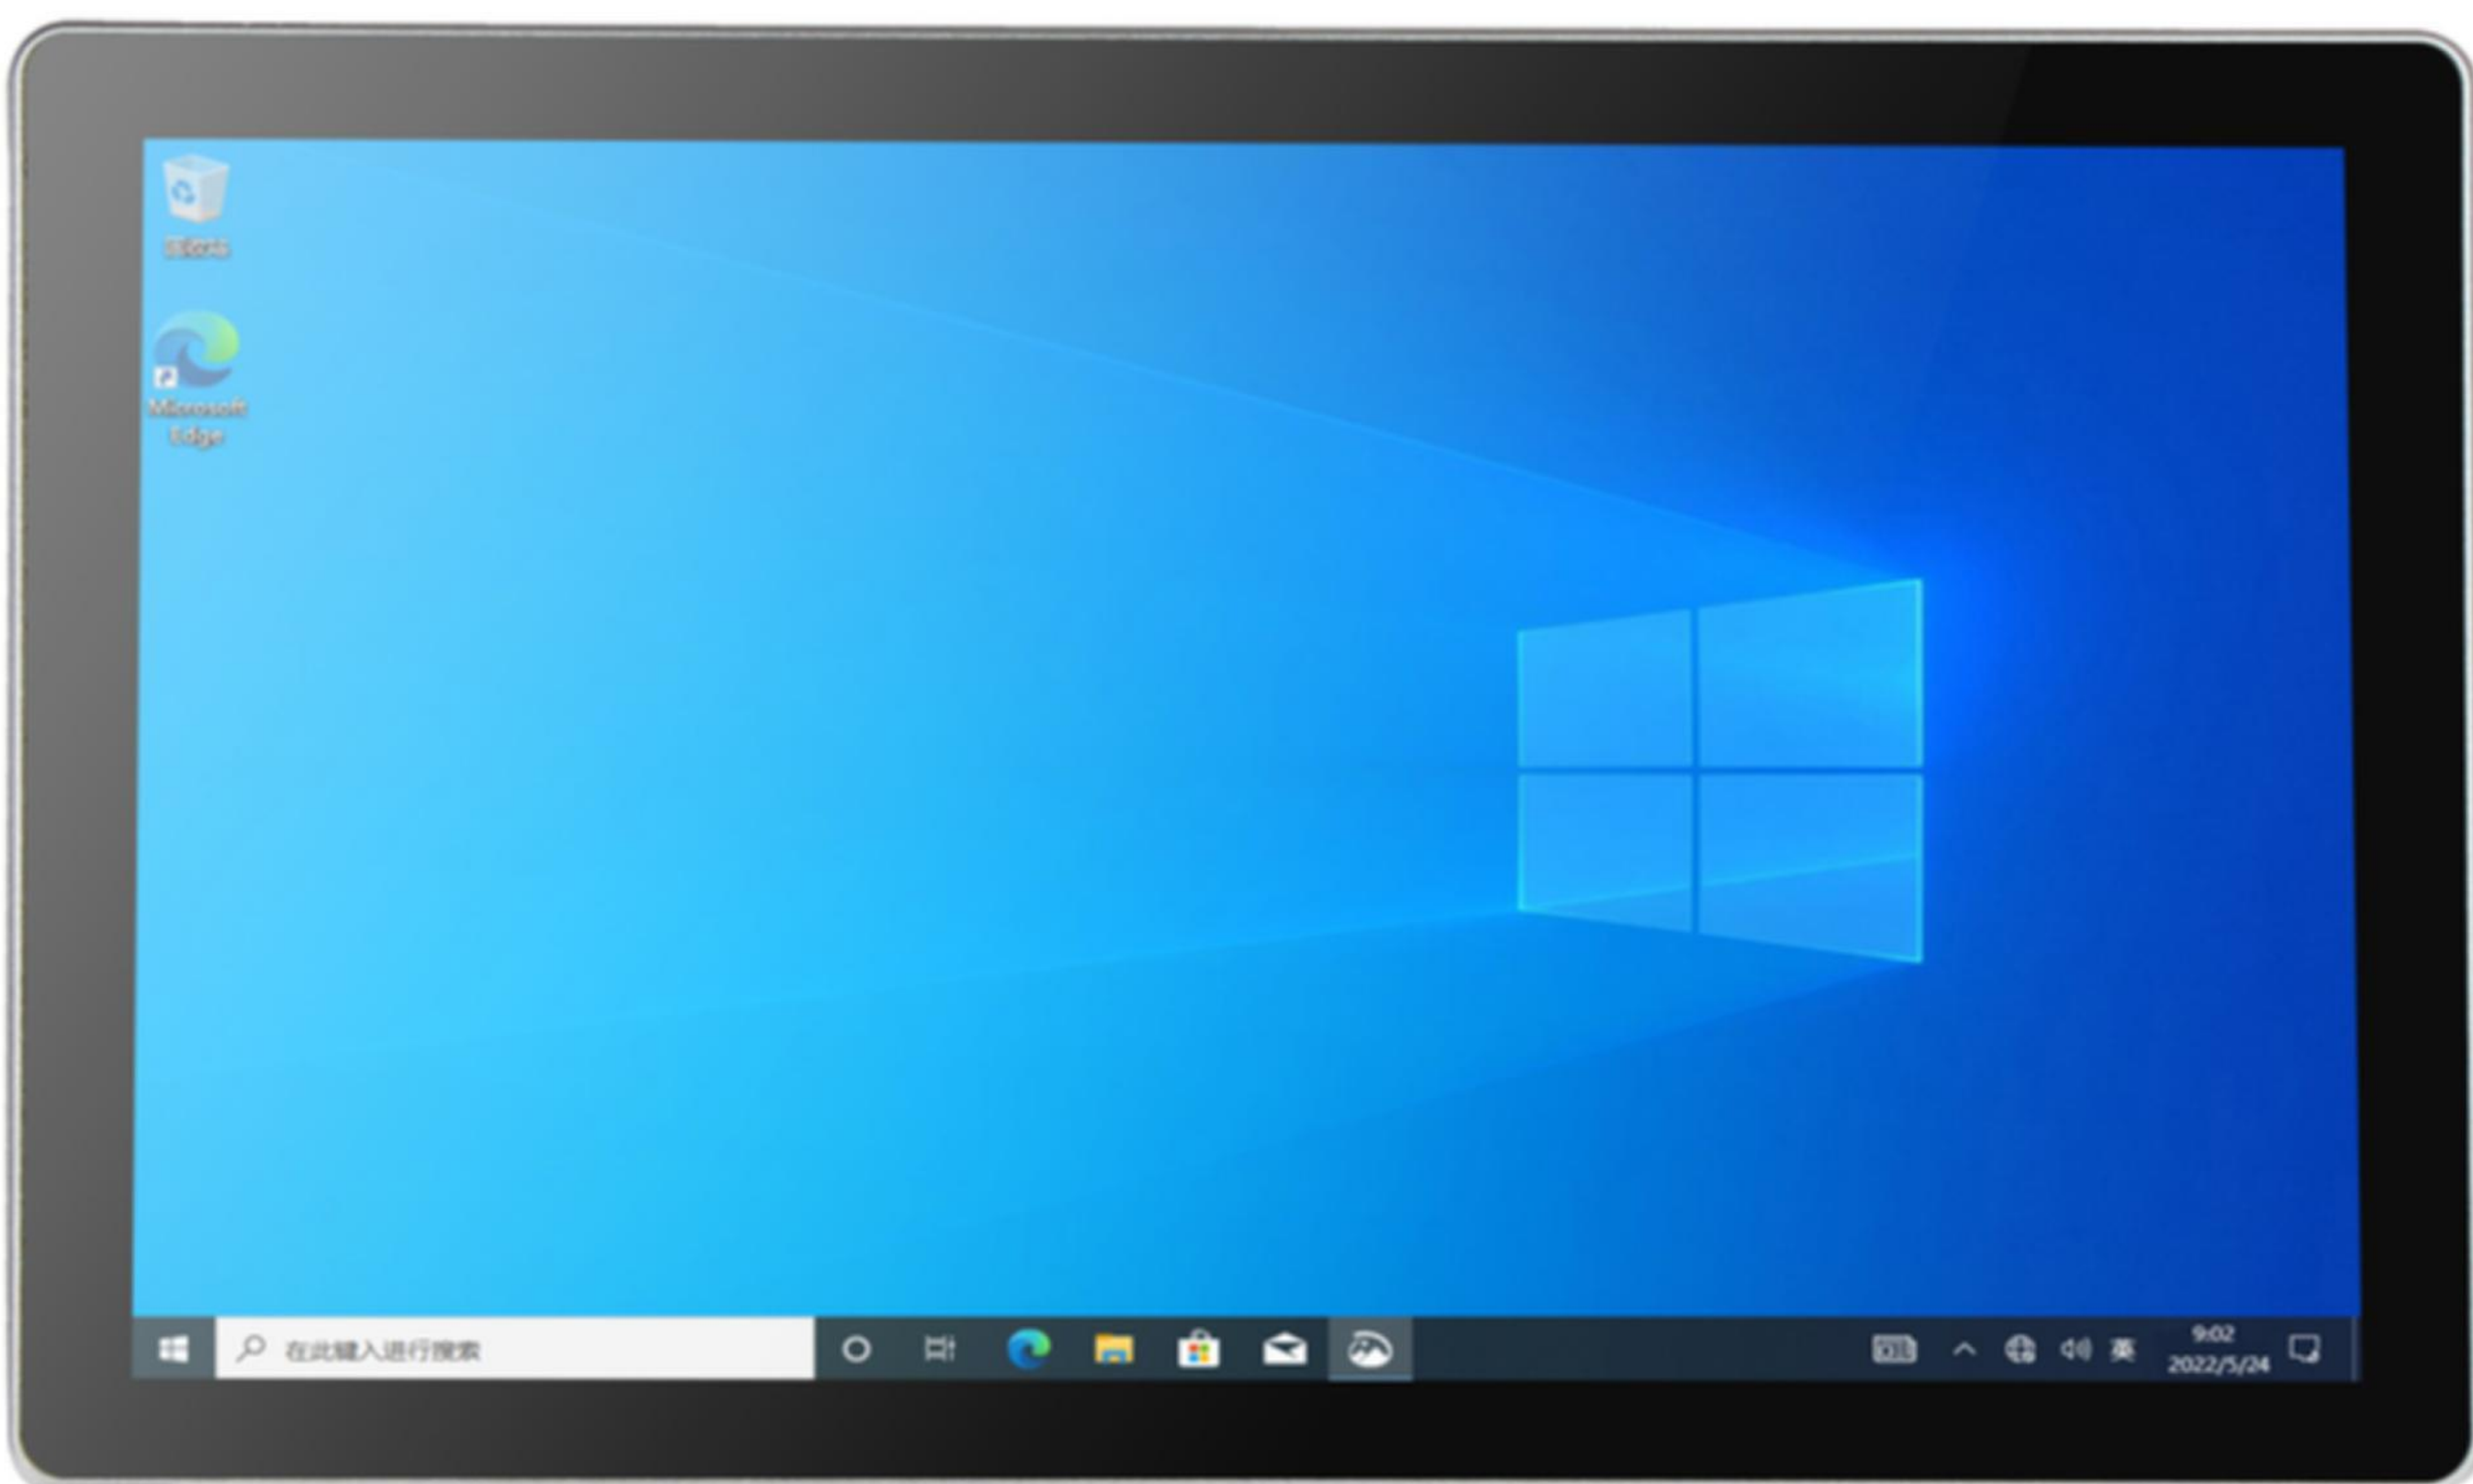

### Specifications:

#### Display

LCD Type	21.5" TFT LED	Contrast Ratio	1000:1
Resolution	1920*1080	Touchscreen Type	capacitive touch screen
Luminance	250 cd/m <sup>2</sup>	Display Input	VGA HD DVI

#### Power

Power Input	100~240VAC/50~60Hz (with adapter)/12V DC input
-------------	--

#### I/O Ports

USB	Touch screen interface
-----	------------------------

#### Environment

Shock Protection	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating Temp.	-10°C~60°C
Vibration Protection	10g acceleration, 11ms period	Storage Temp.	-20°C~70°C
Reliability	MTBF≥50000h; MTTR≤0.5h	Humidity	95% @40°C, no condensation
		IP Rating	Front panel IP65 (optional)

#### Mechanical

Dimension (WxHxD)	527*317.5*54.9mm	Mounting	Aluminum alloy panel fanless design
Weight	2.1kg/2.9kg(N.W./G.W.)	Color	Black

Dimensions:

